


DILX-3G-CB


ITEM NO: 10862

DIGILUX 3 gang wall control box is meticulously engineered with a robust construction utilizing high-quality polycarbonate material, ensuring durability and longevity in diverse environmental conditions. This visually refined enclosure is specifically designed to accommodate Digilux's switched or dimmable insert modules seamlessly.

The matte black finish adds a sophisticated aesthetic touch and enhances the wall control box's resistance to wear and scratches.

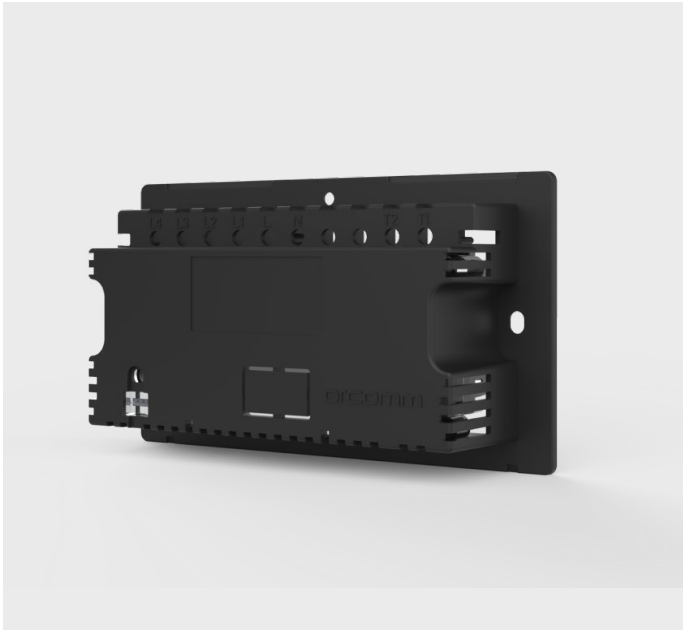

DIMENSION

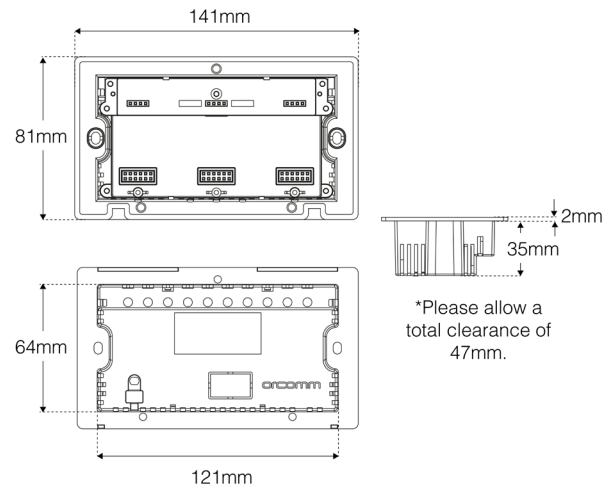

GENERAL

| | | | |
|-----------------|-------|----------|---------------|
| Number of Gangs | 3 | Material | Polycarbonate |
| Colour | Black | Finish | Matt |

ENVIRONMENTAL

| | | | |
|-----------------------------|---------------|--------------------|--------------|
| IP Rating | IP20 | IK Rating | IK04 |
| Operating Temperature Range | -10°C to 40°C | Operating Humidity | 20% - 85% RH |
| Operating Altitude | 2000M | | |

PHYSICAL

| | | | |
|---|-------------------|---|----------|
| Height (mm) | 81 | Width | 141 |
| Depth (mm) | 37 | Weight (grams) | N/A |
| Connection Terminals | Screw (Ph2 Drive) | Terminal Capacity (1mm ² solid core) | 4 Cables |
| Terminal Capacity (1.5mm ² solid core) | 3 Cables | | |

ELECTRICAL

| | | | |
|----------------------|---------------------|----------------------------|-------------------|
| Input Voltage Range | 100-240Vac | Incoming Voltage Frequency | 50/60Hz |
| Maximum Load Wattage | <150W (Per Channel) | Minimum Load Wattage | >1W (Per Channel) |
| Standby Current | 20mA | Notes | Requires Neutral |

CONNECTIVITY

| | | | |
|-----------------|--------|--------------------------|-----|
| Radio Frequency | 2.4GHz | Line of Sight Range Upto | 20m |
|-----------------|--------|--------------------------|-----|

DILX-3G-CB

ITEM NO: 10862

INSTALLATION

| | | | |
|---|------|------------------------------|---------------|
| Backbox Depth (</1.5mm Cable) | 47mm | Backbox Mounting Tabs | 2x Horizontal |
| Mounting | Wall | Fixing Mode | 2x M3.5 Screw |

STANDARDS, APPROVALS AND WARRANTY

| | | | |
|------------------|---------------------------|-----------------|-------------|
| Standards | RoHS, TUV, CE, UKCA, WEEE | Warranty | 2 Year, RTB |
|------------------|---------------------------|-----------------|-------------|