


# ORC-ALARM-16

ITEM NO: 12527

The alarm board is engineered to seamlessly integrate with Orcomm Touch screens equipped with an alarm module. This unit supports the installation of various sensor types, accommodating up to 16 devices, including water leak detectors, gas leak sensors, smoke alarms, panic buttons, window/door contacts, and doorbells.

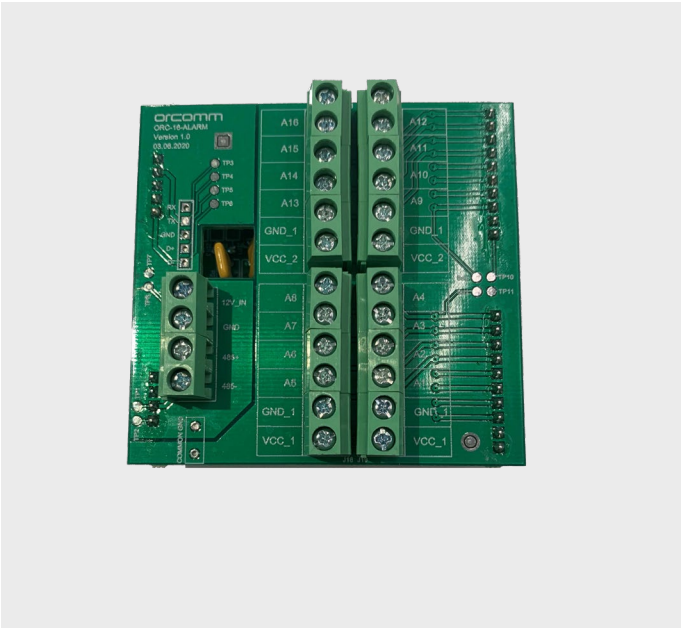

## DETAILS

Size	90mm×90mm×40mm	Inputs	16
Outputs	None	Communication	RS485 / ORC-NET
Casing	None (PCBA)		

## TECHNICAL INFORMATION

Mounting Type	Bracket / Post	Working Voltage	12V DC
Working Current	<100mA	Rated Power	< 10W
Humidity	10% - 95% R.H	Temperature	< 60°C
Weight	0.1KG		

## NOTES

This unit must be installed on post or using DIN rail brackets ORC-BR-ALARM. If you require more than 16 inputs then an additional part can be installed ORCALARM-32